


ViO25-6A

15.2kW(20.4hp)



ADVANCED PRODUCT SUPPORT WITH NEW OPERATION CONTROL SYSTEM

The new ViO comes with the operation control system that enables operator to monitor the operation history of past 3 months.

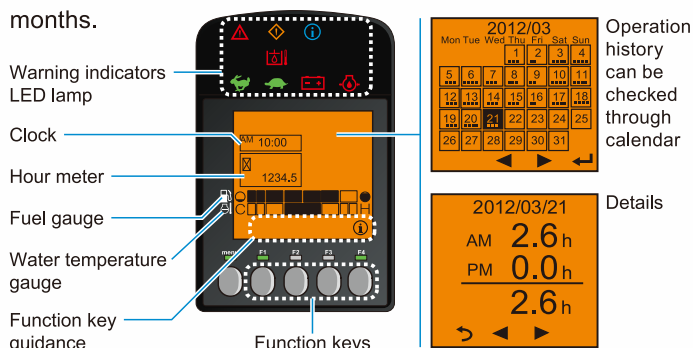

POWERFUL LIFTING CAPACITY

ViO25-6A has powerful lifting capacity that enables operator to work more at the same time.

At max. reach over front on ground

520kg

At max. reach over side on ground


330kg

BOOM SWING BY RIGHT JOYSTICK SLIDE SWITCH


ViO25-6A can control boom swing by slide switch on right joystick that makes your work more comfortable. Also, there is more legroom space because no boom swing pedal.

P.T.O (AUXILIARY HYDRAULIC) PROPORTIONAL CONTROL

For those operators who use attachment, ViO25-6A has proportional control P.T.O. joystick with hold button that allow operator to have easy control over attachment.

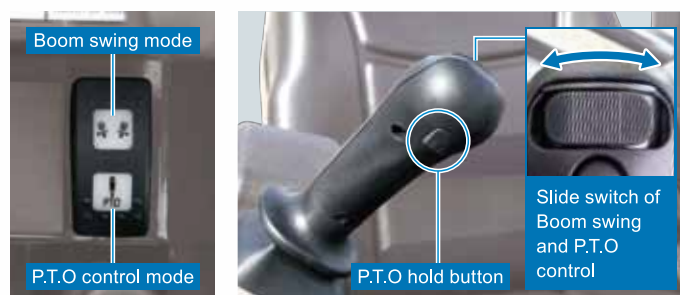

Dimensions

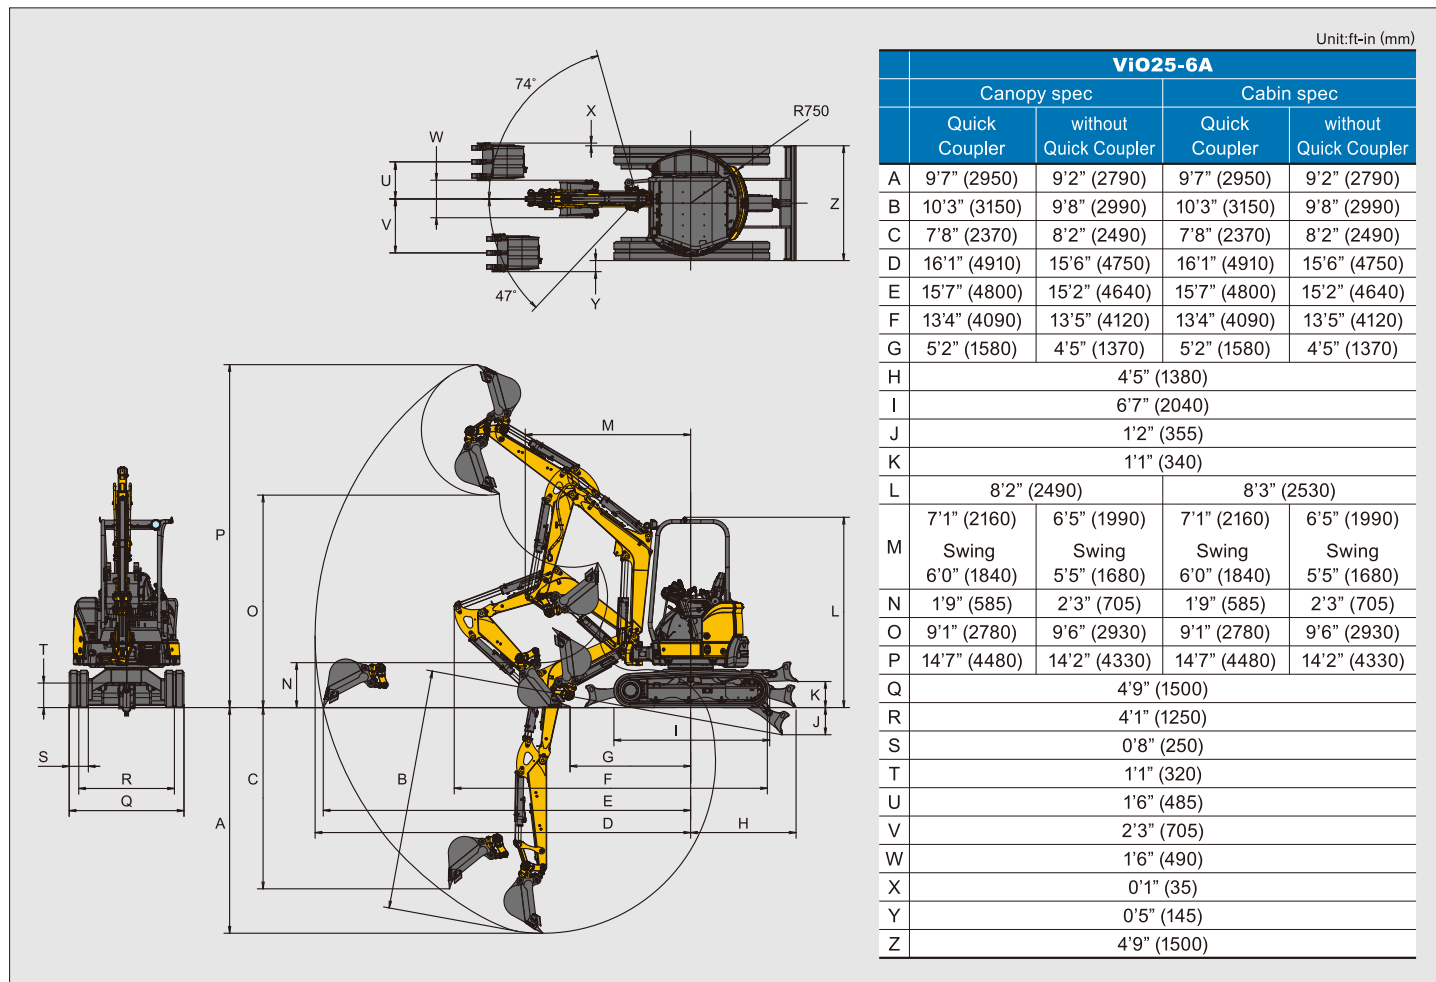

Specifications

Model			ViO25-6A			
Spec			Canopy		Cabin	
Type			Quick coupler	without Quick coupler	Quick coupler	without Quick coupler
Operating Weight	Rubber track	lbs (kg)	5920 (2685)	5810 (2635)	6207 (2815)	6097 (2765)
	Steel track	lbs (kg)	6163 (2795)	6053 (2745)	6450 (2925)	6339 (2875)
Engine	Type	-	4 cycle, inline, water-cooled diesel			
	Model	-	YANMAR 3TNV80F-SXNBV			
	Rated output	hp (kW) / rpm	20.4 (15.2) / 2500			
Performance	Max digging force,Bucket	lbf (kN)	4079 (18.2)	5203 (23.1)	4079 (18.2)	5203 (23.1)
	Traveling speed,high / low	Rubber track MPH (km / h)	2.8 (4.5) / 1.7 (2.8)			
		Steel track MPH (km / h)				
	Swing speed	rpm	10			
	Average ground pressure, standard crawler	Rubber track PSI (kPa)	4.38 (30.2)	4.29 (29.6)	4.60 (31.7)	4.51 (31.1)
		Steel track PSI (kPa)	4.55 (31.4)	4.47 (30.8)	4.76 (32.8)	4.68 (32.3)
Hydraulic System	Hydraulic pump displacement	GPM (L / min)	7.9 (30.0) X 2 / Variable displacement pump 5.6 (21.3) X 1, 3.0 (11.3) X 1 / Gear pump			
	System relief set pressure	PSI (MPa)	2986 (20.6) X 2, 2631 (18.1) X 1, 427 (2.9) X 1			
Fuel tank capacity		lit	30.5			

YANMAR CONSTRUCTION EQUIPMENT CO.,LTD.

OVERSEAS SALES DEPT.
MARKETING & SALES DEPT.

1717-1, Kumano, Chikugo, Fukuoka 833-0055, Japan
Tel: +81-942-53-5465 Fax: +81-942-53-5132
yanmar.com

All data subject to change without notice.